


WALLY 10 UP&DOWN X PRO

ESPECIFICACIONES TÉCNICAS


Modelo	mm (LxWxH)	CT	Dim.	Áng.	CRI	lm	lm/W	W	V	IP
WALLYXPRO-10-UD	1200x54x70	2700K	Sí	18° / 24° / 36°	>90	4350	110	40	220	45
WALLYXPRO-10-UD	1200x54x70	3000K	Sí	18° / 24° / 36°	>90	4350	110	40	220	45
WALLYXPRO-10-UD	1200x54x70	4200K	Sí	18° / 24° / 36°	>90	4350	110	40	220	45

Led OSRAM
UGR <10
MacAdam 3


ACABADOS

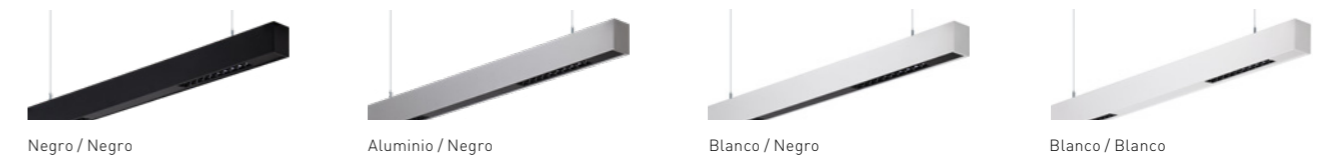

VISTA

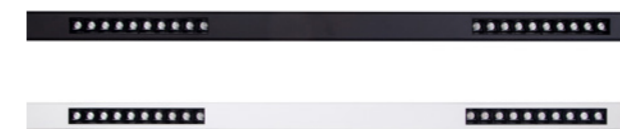

DIMENSIONES (mm)

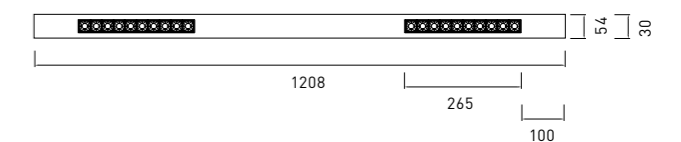

Profundidad: 70

WALLY 10 UP&DOWN X PRO

Artefacto de iluminación directa e indirecta para suspender.
Driver dimerizable TRIAC incluido. Cuerpo de aluminio y reflector de policarbonato.

4350 lm 40W 220V CRI >90 Dim

18° / 24° / 36° 2700K / 3000K / 4200K UGR <10 OSRAM LED

ACCESORIOS

Cod: WLG-PN



Tensores

Cod: WLG-FLORON



Florón (aluminio, blanco, negro)

