


# WALLY 5 UP&DOWN X PRO

## ESPECIFICACIONES TÉCNICAS


Modelo	mm (LxWxH)	CT	Dim.	Áng.	CRI	lm	lm/W	W	V	IP
WALLYXPRO-5-UD	1200x54x70	2700K	Sí	18° / 24° / 36°	>90	2590	129	20	220	45
WALLYXPRO-5-UD	1200x54x70	3000K	Sí	18° / 24° / 36°	>90	2590	129	20	220	45
WALLYXPRO-5-UD	1200x54x70	4200K	Sí	18° / 24° / 36°	>90	2590	129	20	220	45

Led OSRAM  
UGR <10  
MacAdam 3


## ACABADOS

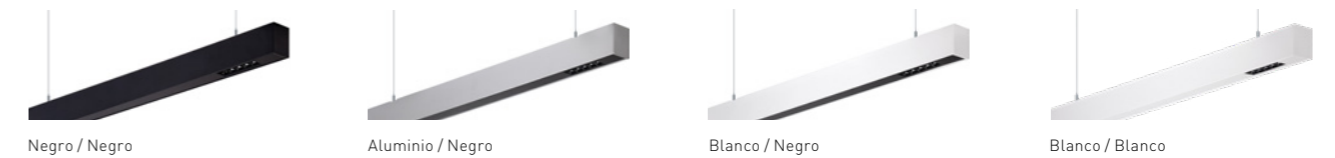

## VISTA

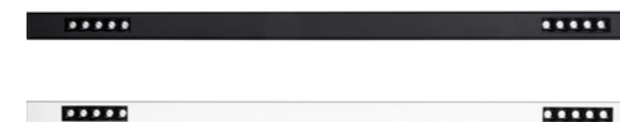

## DIMENSIONES (mm)

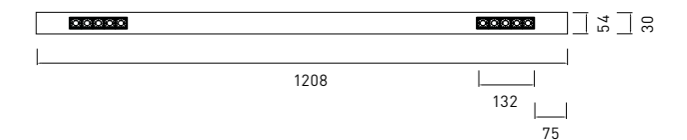

Profundidad: 70

# WALLY 5 UP&DOWN X PRO

Artefacto de iluminación directa e indirecta para suspender o aplicar.  
Driver dimerizable TRIAC incluido. Cuerpo de aluminio y reflector de policarbonato.

2590 lm 20W 220V CRI >90 Dim

18° / 24° / 36° 2700K / 3000K / 4200K UGR <10 OSRAM LED

## ACCESORIOS

Cod: WLG-PN



Tensores

Cod: WLG-FLORON



Florón (aluminio, blanco, negro)

