



# WALLY X PRO 5

Artefacto de iluminación para suspender o aplicar. Driver dimerizable TRIAC incluido.  
Cuerpo de aluminio y reflector de policarbonato.

💡 1440 lm

⚡ 20W 220V

☀️ CRI >90

📶 Dim

📐 18° / 24° / 36°

🌡️ 2700K / 3000K / 4200K

UGR <10

**OSRAM** LED



5 AÑOS DE GARANTÍA



# WALLY X PRO 5

## ESPECIFICACIONES TÉCNICAS

Modelo	mm (LxWxH)	CT	Dim.	Áng.	CRI	lm	lm/W	W	V	IP
WALLYXPRO-5	1200x54x70	2700K	Sí	18° / 24° / 36°	>90	1440	72	20	220	45
WALLYXPRO-5	1200x54x70	3000K	Sí	18° / 24° / 36°	>90	1440	72	20	220	45
WALLYXPRO-5	1200x54x70	4200K	Sí	18° / 24° / 36°	>90	1440	72	20	220	45

Led OSRAM  
UGR <10  
MacAdam 3

## ACABADOS



Negro / Negro



Aluminio / Negro




Blanco / Negro




Blanco / Blanco

## VISTA

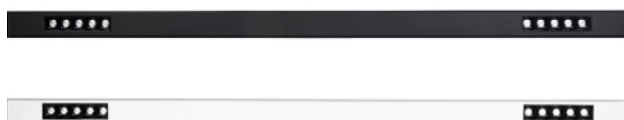

## DIMENSIONES (mm)

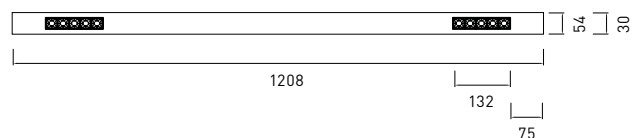

Profundidad: 70

## ACCESORIOS OPCIONALES

Cod: WLG-PN



Tensores

Cod: WLG-FLORON

Florón (aluminio,  
blanco, negro)

Cod: WLG-CL-06

Accesorio para  
aplicar rápido